

4-channel IP Recorder NVR-6204-H1/LITE



KEY FEATURES



- 4 x video and audio channels
- Recording speed up to 120 fps at 3200 x 1800
- Supports resolution up to 3200 x 1800
- Recorded stream size: 40 Mb/s in total from all cameras
- 1 x internal place for HDD mounting
- 2 x monitor outputs (HDMI, VGA)
- Intelligent image analysis

COMPLIANCE



DIMENSIONS

The recorder is dedicated to work with NOVUS 6000 series IP cameras. Detailed data can be found in the compatibility table available in the **DOWNLOADABLE FILES** tab.

The recorder need 1.4.10 firmware version to support 6Mpx IP cameras.

VIDEO

IP Cameras	up to 4 channels at 3200 x 1800 resolution (video + audio)
Maximum Supported Camera Resolution	3200 x 1800
Compression	H.264, H.265, H.265+, H.265 Smart
Monitor Output	main (split screen, full screen, sequence): 1 x HDMI, 1 x VGA (up to 2 monitors simultaneously)
Dualstreaming Support	yes
Fisheye Support	yes, 6000 IP series cameras • using any web browser, N-VID6, N Control 6000

AUDIO

Audio Input/Output	- / 1 x HDMI
--------------------	--------------

RECORDING

Stream Size	40 Mb/s in total from all cameras
Recording Mode	continuous, triggered by: manual, alarm input, motion detection, intelligent image analysis functions
Prealarm/Postalarm	up to 5 s/up to 600 s

DISPLAY

Display Speed	120 fps (4 x 30 fps)
---------------	----------------------

PLAYBACK

Playback Speed	120 fps (4 x 30 fps)
Recorded Data Search	by date/time, events, image analysis events, POS, motion in a defined area, tags, license plate number

BACKUP

Backup Methods	USB port (HDD or Flash memory), network
Backup File Format	AVI, RPAS (player included)


STORAGE

Internal Storage	available mount: 1 x HDD 3.5" 10 TB SATA
Total Internal Capacity	10 TB

ALARM

Camera Alarm Input/Output	supports IP camera's alarm input/output
---------------------------	---

4-channel IP Recorder NVR-6204-H1/LITE

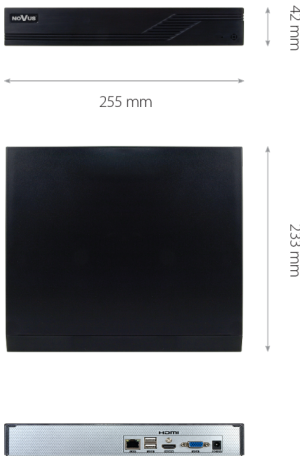

Motion Detection	supports camera's motion detection
System Reaction to Alarm Events	buzzer, alarm output activation, recording activation, PTZ, e-mail with attachment, Full Screen, PUSH message, voice prompt, snapshot

INTELLIGENT IMAGE ANALYSIS

Supported Functions	Exception, Scene Change, Video Blurred, Video Color Cast, Tripwire, Zone entrance, Abandoned Object, Object Disappearance, Crowd detection, Face Detection, Cross Counting, Fire detection, Temperature measurement, Video metadata
---------------------	---

NETWORK

Network Interface	1 x Ethernet - RJ-45 interface, 10/100 Mbit/s
Network Protocols Support	HTTP, TCP/IP, IPv4/v6, HTTPS, FTP, DHCP, DNS, DDNS, NTP, RTSP, UPnP, SNMP, IEEE 802.1X, PPPoE, SMTP, P2P, POS, HTML5
PC/MAC Software	NOVUS MANAGEMENT SYSTEM VSS, NOVUS MANAGEMENT SYSTEM AC, NMS, Internet Explorer, Firefox, Chrome, Opera, N Control 6000, Edge/Safari, N Control 6000
Mobile applications	SuperLive Plus (iPhone, Android)
Number of Simultaneous Connections	up to 64 clients, up to 8 main streams or 64 substreams or 4 playback streams in total
Bandwidth	40 Mb/s in total to all client workstations

PTZ

PTZ Functions	pan/tilt/zoom, preset commands
---------------	--------------------------------

AUXILIARY INTERFACES

USB Ports	2 x USB 2.0
-----------	-------------

OPERATING SYSTEM

Operating System	Linux
OSD	languages: Polish, English, others
Control	PC mouse (in-set included), network
System Diagnostic	automatic control of: HDDs, network, camera connection loss
Security	password protection, IP filtering, MAC filtering, ARP guard

INSTALLATION PARAMETERS

Dimensions (mm)	255 (W) x 42 (H) x 233 (D)
Weight	0.7 kg (without HDD)
Power Supply	12 VDC (100 ~ 240 VAC/12 VDC PSU in-set included)
Power Consumption	18 W (with 1 HDD)
Operating Temperature	-10°C ~ 50°C

The availability of individual functions (including image analysis) depends on the model of the cameras used, as well as the software version of the recorder and cameras. Presented display and playback speeds are achieved using dual-streaming. Detailed data on hard drives can be found in the compatibility table available in the DOWNLOADABLE FILES tab. "INGENIUS PLUS" features support means, that "INGENIUS" is also supported. The recorder need 1.4.10 firmware version to support 6Mpx IP cameras.