




IP Surge Protector  
NVS-810E

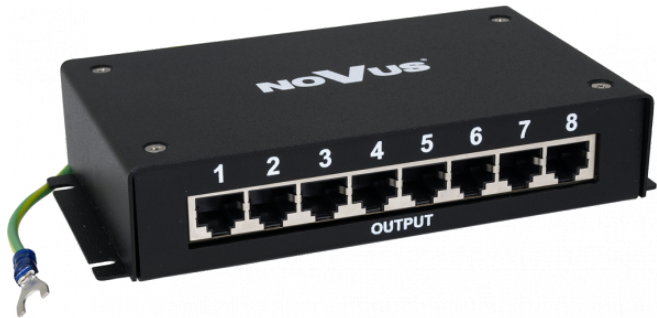

GENERAL

|                                       |                                                                  |
|---------------------------------------|------------------------------------------------------------------|
| Type                                  | Surge protector operating in Ethernet cable network transmission |
| Nominal Voltage                       | 5 V                                                              |
| Maximum Voltage                       | 6 V                                                              |
| Line-Line Voltage Protection Level    | $U_p \leq 40V$ (1kV/ $\mu s$ , C3)                               |
| Line-Ground Voltage Protection Level  | $U_p \leq 600 V$ (1 kV/ $\mu s$ , C3)                            |
| Line-Line Nominal Discharge Current   | $I_n = 20 A$ (10/1000 $\mu s$ , C3)                              |
| Line-Ground Nominal Discharge Current | $I_n = 20A$ (10/1000 $\mu s$ ), C3                               |
| Connector                             | Input: 8 x RJ45 / Output 8 x RJ45                                |
| Dimensions (mm)                       | 162 (W) x 90 (H) x 37 (L)                                        |
| Weight                                | 500 g                                                            |

