


Surge Protector

NVS-021CB-HD

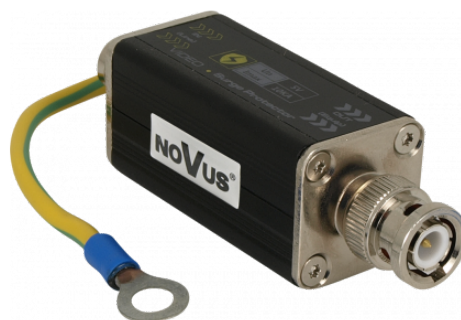

GENERAL

Device Type	Single Channel Video Surge Protector
-------------	--------------------------------------

VIDEO PROTECTION

Continuous Operating Voltage	5 V
Max Voltage Operating	6 V
Nominal Discharging Current (8/20 μ s)	5 kA
Max Discharging Current (8/20 μ s)	10 kA
Limit Voltage (10/700 μ s)	< 20 V
Response Time	≤ 1 ns
Insertion Impedence	$\leq 1\Omega$

INSTALLATION PARAMETERS

Operating Temperature	-40°C ~ 55°C
Dimensions (mm)	65 (W) x 25 (H) x 25 (L)
Case	aluminium, black