

AHD Recorder NHDR-5132AHD

5000
AHD SERIES




KEY FEATURES



- Video channels: 32, audio channels: 4
- Recording speed: up to 800 fps (AHD), up to 200 fps (IP)
- Internal HDDs mount: up to 4
- Monitor outputs: 2 (2 x main, 1 x spot)
- Advanced network software
- Supports HD analog cameras (720p, 1080p)
- IP cameras support (hybrid mode)
- PIR cameras support
- Supports POS devices

DIMENSIONS

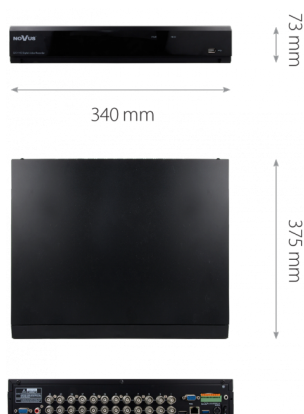

VIDEO

Video Input	32 x BNC
Operating mode	AHD 1080p, AHD 720p, analog 960H
Monitor Output	main (split screen, full screen, sequence): 1 x HDMI (4K UltraHD), 1 x VGA (FullHD) • spot: 1 x VGA (HD) interchangeably to main output
IP Streams	DVR mode: 32 x BNC + 0 x IP • hybrid mode: 32 x BNC + 8 x IP
Supported IP resolution	max. 2688 x 1520

AUDIO

Audio Input/Output	4 x RCA (Line-in)/1 x HDMI, 1 x RCA
--------------------	-------------------------------------

RECORDING

Compression	H.264
Recording Speed	800 fps (960 x 576 - 960H) • 800 fps (1280 x 720 - HD) • 480 fps (1920 x 1080 - FullHD)
IP recording speed	hybrid mode: 200fps
IP stream size	hybrid mode: 32 Mb/s in total from all IP cameras
Recording Mode	continuous, triggered by: REC/PANIC button, alarm input, motion detection, PIR alarm
Schedule	individual settings for: each camera, each day of the week, configuration with an accuracy of: 30 min, possibility of combining individual recording modes

Prealarm/postalarm	up to 3 s/up to 5 min
--------------------	-----------------------

PLAYBACK

Playback speed	400 fps
IP playback speed	200 fps
Recorded Data Search	by date/time, events, object appearance/disappearance, POS

BACKUP

Backup Methods	USB port (HDD or Flash memory), network
Backup File Format	BMP, MP4, AVI, H264

STORAGE

Internal storage	available mount: 4 x HDD 3.5" SATA
Total Internal Capacity	24 TB
External storage	1 x eSATA
Total External Capacity	24 TB

ALARM

Alarm Input/Output	8/1 relay type
--------------------	----------------

AHD Recorder NHDR-5132AHD

Motion Detection	36 x 44 grid, individual settings of sensitivity, PIR cameras support
System Reaction to Alarm Events	buzzer, e-mail, alarm output activation, screen message, recording activation

NETWORK

Network Interface	1 x Ethernet - RJ-45 interface, 10/100/1000 Mbit/s
PC/MAC Software	NMS, Internet Explorer, NHDR-5000 Viewer/NHDR-5000 Viewer
Mobile applications	RxCamView (iPhone, Android)
Number of Simultaneous Connections	up to 5 (live monitoring: 5, playback: 1, configuration: 5)
Bandwidth	32 Mb/s in total to all client workstations

PTZ

PTZ Ports	1 x RS-485
PTZ Protocols	Pelco-D, Pelco-P
PTZ Functions	pan/tilt/zoom, preset commands, patterns

COAX

COAX Functions	menu, zoom, focus, PTZ
----------------	------------------------

POS

Number of POS channels	4
POS Interface	Ethernet
POS Functions	display text on the video, keyword search, export text with the video

AUXILIARY INTERFACES

USB Ports	1 x USB 3.0, 1 x USB 2.0
-----------	--------------------------

OPERATING SYSTEM

Operating System	Linux
OSD	languages: Polish, English, Russian, others
Control	PC mouse and IR remote controller (in-set included), network, NV-KBD50 keyboard
System Diagnostic	automatic control of: HDDs, camera connection loss

INSTALLATION PARAMETERS

Dimensions (mm)	375 (W) x 73 (H) x 340 (D)
Weight	2.8 kg (without HDDs)
Power Supply	12 VDC (100 ~ 240 VAC/12 VDC PSU in-set included)
Power Consumption	50 W (with 4 HDDs)
Operating Temperature	-10°C ~ 45°C

List of compatible HDD models and maximum of their capacities is available in section **DOWNLOADABLE FILES**.

Multistandard and ESATA is available in DVR from serial No 1704..

POS feature available from NHDR5132AHD_V180125_W firmware.

One of the functions: SPOT monitor, POS can be switched on at once.

Recording speed may be limited in POS mode.