
Bullet IP Camera with Motor-zoom Lens

NVIP-5DN2004H/IR-1P



KEY FEATURES

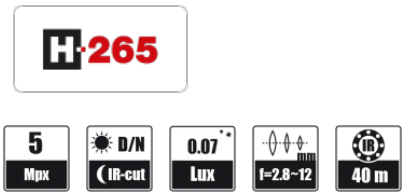

- Resolution: 5 MPX
- Lens: motorized, auto-focus function, f=2.8 ~ 12 mm/F1.4
- D/N function - IR cut filter
- Video content analysis
- Min. Illumination: 0.07 lx (0 lx, IR on)
- IR LED, range up to 40 m

COMPLIANCE

DIMENSIONS



IMAGE

Image Sensor	5 MPX CMOS sensor 1/3.2" OmniVision
Number of Effective Pixels	2592 (H) x 1944 (V)
Min. Illumination	0.07 lx/F1.4 - color mode • 0 lx (IR on) - B/W mode
Electronic Shutter	auto/manual: 1/5 s ~ 1/20000 s
Digital Slow Shutter (DSS)	up to 1/5 s
Wide Dynamic Range (WDR)	yes
Digital Noise Reduction (DNR)	2D, 3D
Defog Function (F-DNR)	yes

LENS

Lens Type	motorized, f=2.8 ~ 12 mm/F1.4
Auto-focus	zoom trigger, day/night mode trigger, manual trigger

DAY/NIGHT

Mode	day/night switching: mechanical IR cut filter
Switching Mode	auto, manual
Switching Delay	1 ~ 36 s
Visible Light Sensor	yes

NETWORK

Stream Resolution	2592 x 1520, 2592 x 1944, 2304 x 1296, 1920 x 1080 (Full HD), 2048 x 1520, 1280 x 960, 1280 x 720 (HD), 704 x 576, 640 x 480 (VGA), 320 x 240 (QVGA)
Frame Rate	15 fps for • 20 fps for • 30 fps for and lower resolutions
Multistreaming Mode	number of streams: 3
Video/Audio Compression	H.264, H.265/-
Number of Simultaneous Connections	max. 10
Bandwidth	63 Mb/s in total
Network Protocols Support	HTTP, TCP/IP, IPv4, FTP, DHCP, DNS, DDNS, NTP, RTSP, RTP, UPnP, SMTP
ONVIF Protocol Support	Profile S (ONVIF 2.6)
Camera Configuration	from Internet Explorer, Firefox browser • languages: Polish, English, Russian, and others
Compatible Software	NOVUS MANAGEMENT SYSTEM VSS

VIDEO ANALYTICS

Functions	tamper, abandoned object, object disappearance, line cross, zone entrance, object counting, face detection, pedestrian detection

Bullet IP Camera with Motor-zoom Lens
NVIP-5DN2004H/IR-1P

OTHER FUNCTIONS

Privacy Zones	4
Motion Detection	yes
Region of interest (ROI)	8
Image Processing	180˚ image rotation, corridor mode, vertical flip, horizontal flip
System Reaction to Alarm Events	e-mail with attachment, saving file on FTP server

IR LED

LED Number	30
Range	40 m
Angle	120°

INTERFACES

Network Interface	1 x Ethernet - RJ-45 interface, 10/100 Mbit/s

INSTALLATION PARAMETERS

Dimensions (mm)	with bracket: 84 (Φ) x 232 (L)
Weight	0.7 kg
Degree of Protection	IP 66 (details in the user's manual)
Enclosure	aluminium, white, fully cable managed wall mount bracket in-set included
Power Supply	12 VDC, PoE (IEEE 802.3af, Class 3)
Power Consumption	2 W • 8 W (IR illuminator on)
Operating Temperature	-35°C ~ 60°C