


## 16-port PoE Switch NVS-3116SP



### KEY FEATURES

- 16 x 100Mbps PoE+
- 2 x 1000Mb/s UPLINK, 1 x 1000Mb/s SFP UPLINK

### DIMENSIONS

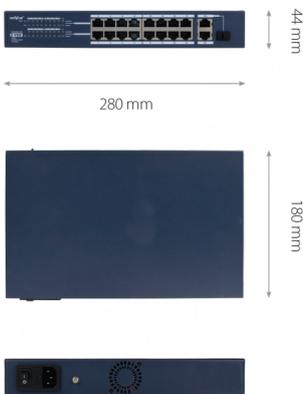

### GENERAL

Device Type PoE+ Switch

### NETWORK

Ports	PoE+ Ports: 16 x 10/100Mbps (the number of ports simultaneously operating with PoE + mode is limited by PoE budget) • UPLINK SFP port 1Gb/s x1 • Uplink Combo x 1 :SFP(1Gb/s) + RJ45(1Gb/s)
PoE standards	IEEE802.3af, Class 3, IEEE802.3at, Class 4
PoE mode	Endspan (1,2+ / 3,6-)
Switching capacity	7.2 Gb/s
Supported protocols	IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3ab 1000BASE-T, IEEE 802.3z 1000BASE-SX\LX
MAC address list	4K

### INSTALLATION PARAMETERS

RACK Mount 19"	1U
Case	Metal, navy blue color
Dimensions (mm)	280 (W) x 44 (H) x 180 (L)
Weight	1.9 kg
Input Voltage	100 ~ 240 VAC, 50/60Hz
Power Consumption	190 W
PoE Budget	190 W for ports 1 to 16, up to 30 W for one port
Operating Temperature	0°C ~ 40°C