

Multistandard AHD Recorder NHDR-4308AHD

4000 VSS
HYBRID




KEY FEATURES



- Video channels: 8, audio channels: 8
- Recording speed: up to 240 fps (AHD), up to 360 fps (IP)
- Internal HDDs mount: up to 2
- Monitor outputs: 2 (2 x main, 1 x spot)
- Supports HD analog cameras (720p, 1080p, 4MPX, 5MPX, 8MPX)
- Supports AHD, TVI, CVI cameras
- IP cameras support (hybrid mode)
- Intelligent image analysis
- PIR cameras support
- Supports POS devices

DIMENSIONS

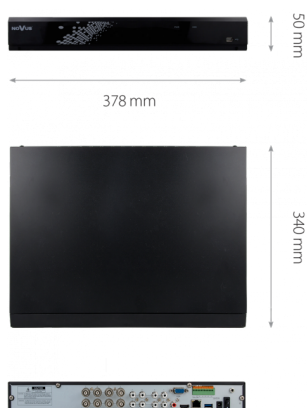

VIDEO

Video Input	8 x BNC
Operating mode	AHD 8Mpx, TVI 8Mpx, CVI 4Mpx, analog 960H
Monitor Output	main (split screen, full screen, sequence): 1 x HDMI (4K UltraHD), 1 x VGA (FullHD) • spot: 1 x VGA (HD) interchangeably to main output
IP Streams	DVR mode: 8 x BNC + 0 x IP • hybrid mode: 8 x BNC + 4 x IP • IP mode: 0 x BNC + 12 x IP
Supported IP resolution	max. 3840 x 2160

AUDIO

Audio Input/Output	8 x RCA (Line-in)/1 x HDMI, 1 x RCA
--------------------	-------------------------------------

RECORDING

Compression	H.264, H.265
Recording Speed	240 fps (1280 x 720 - HD) • 240 fps (1920 x 1080 - FullHD) • 120 fps (2560 x 1440 - 4Mpx) • 80 fps (2560 x 1944 - 5Mpx) • 56 fps (3840 x 2160 - 8Mpx)
IP recording speed	hybrid mode: 120fps • IP mode: 360fps
IP stream size	hybrid mode: 32 Mb/s in total from all IP cameras • IP mode: 96 Mb/s in total from all IP cameras
Recording Mode	continuous, triggered by: REC/PANIC button, alarm input, motion detection, PIR alarm, image analysis
Schedule	individual settings for: each camera, each day of the week, configuration with an accuracy of: 30 min, possibility of combining individual recording modes
Prealarm/postalarm	up to 3 s/up to 5 min

PLAYBACK

Playback speed	240 fps
IP playback speed	240 fps
Recorded Data Search	by date/time, events, image analysis events, motion in a defined area, tags

BACKUP

Backup Methods	USB port (HDD or Flash memory), network
Backup File Format	JPG, BMP, PNG, MP4, AVI

STORAGE

Internal storage	available mount: 2 x HDD 3.5" SATA
Total Internal Capacity	28 TB

ALARM

Alarm Input/Output	8/1 relay type
--------------------	----------------

Multistandard AHD Recorder

NHDR-4308AHD

Motion Detection	36 x 44 grid, individual settings of sensitivity, PIR cameras support
System Reaction to Alarm Events	buzzer, e-mail, alarm output activation, screen message, recording activation, PTZ, Full Screen, FTP picture upload, FTP video upload, picture to Cloud, video to Cloud

INTELLIGENT IMAGE ANALYSIS

Supported functions	Exception, Line cross, Zone entrance, Abandoned object, Object disappearance, Face detection, Pedestrian detection, Cross counting, Sound detection
Number of channels	1 x BNC, 12 x IP (2000 and 4000 Serie)

NETWORK

Network Interface	1 x Ethernet - RJ-45 interface, 10/100 Mbit/s
Network Protocols Support	HTTP, TCP/IP, IPv4, HTTPS, FTP, DHCP, DNS, DDNS, NTP, RTSP, UPnP, SNMP, SMTP, P2P
PC/MAC Software	NMS, Internet Explorer, NHDR-5000 Viewer/NHDR-5000 Viewer
Mobile applications	RxCamView (iPhone, Android)
Number of Simultaneous Connections	up to 20 (live monitoring: 20, playback: 1, configuration: 20)
Bandwidth	96 Mb/s in total to all client workstations

PTZ

PTZ Ports	1 x RS-485
PTZ Protocols	Pelco-D, Pelco-P
PTZ Functions	pan/tilt/zoom, preset commands, patterns

COAX

COAX Functions	menu, zoom, focus, PTZ
----------------	------------------------

POS

Number of POS channels	4
POS Interface	Ethernet, RS485
POS Functions	display text on the video, keyword search, export text with the video

AUXILIARY INTERFACES

USB Ports	1 x USB 2.0, 1 x USB 3.0
-----------	--------------------------

OPERATING SYSTEM

Operating System	Linux
OSD	languages: Polish, English, Russian, others
Control	PC mouse and IR remote controller (in-set included), network, NV-KBD50 keyboard
System Diagnostic	automatic control of: HDDs, camera connection loss
Security	password protection, IP filtering

INSTALLATION PARAMETERS

Dimensions (mm)	378 (W) x 50 (H) x 340 (D)
Weight	2.5 kg (without HDDs)
Power Supply	12 VDC (100 ~ 240 VAC/12 VDC PSU in-set included)
Power Consumption	30 W (with 2 HDDs)
Operating Temperature	-10°C ~ 55°C



Multistandard AHD Recorder **NHDR-4308AHD**

The recorder is dedicated to work with AHD cameras, Novus 2000 and 4000 series IP cameras and achieves the best functionality with them. In case of work with IP cameras intelligent image analysis, dualstream mode, PTZ control, motion detection and alarm inputs / outputs functions depend on the functionality of the IP camera and the capabilities of the communication protocol. Detailed data on camera compatibility with recorders and compatible hard drives can be found in the compatibility tables available in the DOWNLOADABLE FILES tab.

Display and playback speeds are achieved using dual stream.

The recording speed of analog cameras may be limited during playback.

One of the functions: POS, SPOT monitor, Intelligent Image Analysis can be switched on at the same time.

