




## Magnetic contact, Grade 2

### AST-MKT4017/G2

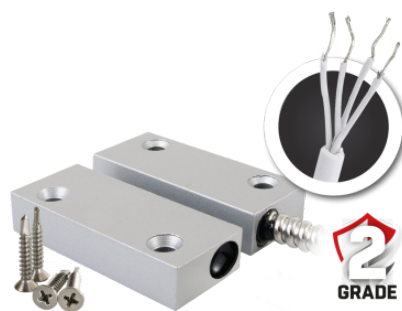

|                          |                                                                           |
|--------------------------|---------------------------------------------------------------------------|
| Reed switch parameters   | 0.5A/100VDC/10W/200mΩ                                                     |
| Output                   | NC                                                                        |
| Applications             | windows, metal doors                                                      |
| EN Grade                 | Grade II                                                                  |
| Tamper loop              | yes                                                                       |
| Connection               | armored cable (armor 36 cm lenght, cable 56 cm lenght)                    |
| Switching distance (gap) | 30mm - 40mm                                                               |
| Colour                   | steel                                                                     |
| Dimensions               | contact: 20mm x 49mm x 9.6mm (LxWxH), magnes: 20mm x 49mm x 9.6mm (LxWxH) |