


Vandal Proof IP Camera with Fisheye Lens NVIP-9F-4301

4000 VSS IP



KEY FEATURES

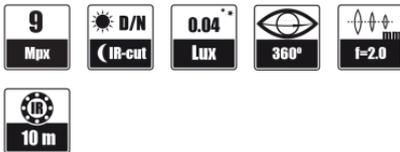

- Resolution: 9 MPX
- Lens: fisheye, f=2.0 mm/F2.4
- built-in microphone
- D/N function - IR cut filter
- microSD card support
- Min. Illumination from 0.04 lx (0 lx, IR on)
- IR LED, range up to 10 m

DIMENSIONS



IMAGE

| | |
|-------------------------------|---|
| Image Sensor | 12 MPX CMOS sensor 1/1.7" SONY Exmor R STARVIS |
| Number of Effective Pixels | 4072 (H) x 3046 (V) |
| Min. Illumination | 0.04 lx/F2.4 - color mode • 0 lx (IR on) - B/W mode |
| Electronic Shutter | auto/manual: 1/5 s ~ 1/20000 s |
| Digital Slow Shutter (DSS) | up to 1/5 s |
| Wide Dynamic Range (WDR) | yes |
| Digital Noise Reduction (DNR) | 2D, 3D |
| Defog Function (F-DNR) | yes |
| Back Light Compensation (BLC) | yes |

LENS

| | |
|-----------|------------------------|
| Lens Type | fisheye, f=2.0 mm/F2.4 |
|-----------|------------------------|

DAY/NIGHT

| | |
|----------------------|---|
| Mode | day/night switching: mechanical IR cut filter |
| Switching Mode | auto, manual |
| Switching Delay | 1 ~ 36 s |
| Visible Light Sensor | yes |

NETWORK

| | |
|------------------------------------|---|
| Stream Resolution | 3000 x 3000, 2560 x 2560, 2160 x 2160, 1520 x 1520, 1080 x 1080, 720 x 720, 480 x 480 |
| Frame Rate | 30 fps for and lower resolutions |
| Multistreaming Mode | number of streams: 3 |
| Video/Audio Compression | H.264, H.265/G.711, G.726, ADPCM |
| Number of Simultaneous Connections | max. 10 |
| Bandwidth | 40 Mb/s in total |
| Network Protocols Support | HTTP, TCP/IP, IPv4, HTTPS, FTP, DHCP, DNS, DDNS, NTP, RTSP, RTP, UPnP, PPPoE, SMTP, P2P |
| ONVIF Protocol Support | Profile S |
| Camera Configuration | from Internet Explorer browser • languages: Polish, English, Russian, and others |
| Compatible Software | NOVUS MANAGEMENT SYSTEM VSS |
| Mobile applications | RxCamView (iPhone, Android) |

OTHER FUNCTIONS

| | |
|------------------|-----|
| Privacy Zones | 4 |
| Motion Detection | yes |

Vandal Proof IP Camera with Fisheye Lens NVIP-9F-4301

| | |
|---------------------------------|---|
| Prealarm/Postalarm | -/up to 300 s |
| System Reaction to Alarm Events | e-mail with attachment, saving file on FTP server, saving file on SD card, alarm output activation, saving in the cloud storage |

IR LED

| | |
|------------|------------------------|
| LED Number | 3 |
| Range | 10 m |
| Angle | 120° |
| Smart IR | yes (software support) |

INTERFACES

| | |
|--------------------|---|
| Video Output | BNC, 1.0 Vp-p, 75 Ohm |
| Audio Input/Output | built-in microphone/- |
| Alarm Input/Output | 1 (NO/NC)/1 |
| Network Interface | 1 x Ethernet - RJ-45 interface, 10/100 Mbit/s |
| Memory Card Slot | microSD - capacity up to 128GB |

INSTALLATION PARAMETERS

| | |
|-----------------------|--------------------------------------|
| Dimensions (mm) | 120 (Φ) x 55 (H) |
| Weight | 0.45 kg |
| Degree of Protection | IP 66 (details in the user's manual) |
| Enclosure | vandalproof, aluminium, white |
| Power Supply | 12 VDC, PoE (IEEE 802.3af, Class 3) |
| Surge protection | TVS 4000 V |
| Power Consumption | 7 W • 11 W (IR illuminator on) |
| Operating Temperature | -30°C ~ 55°C |
| Humidity | max. 95%, relative (non-condensing) |