

## Bullet AHD Multistandard Camera

**NHDC-2H-6101**

**6000 VSS MULTI HD**




### KEY FEATURES



- D/N function - IR cut filter
- resolution 1080p
- Lens: fixed focal, f=2.8 mm/F2.2
- Smart IR function
- multistandard: AHD, CVI, TVI, 960H
- IR LED, range up to 30 m

### DIMENSIONS

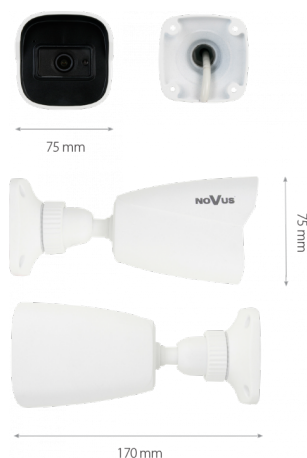

### IMAGE

|                               |                                                                            |
|-------------------------------|----------------------------------------------------------------------------|
| Image Sensor                  | CMOS sensor 1/2.7" SUPERPIX                                                |
| Operating mode                | AHD 1080p, AHD 720p, TVI 1080p, TVI 720p, CVI 1080p, CVI 720p, analog 960H |
| Number of Effective Pixels    | 1920 (H) x 1080 (V)                                                        |
| Resolution                    | 1080p                                                                      |
| Min. Illumination             | 0 lx (IR on) - B/W mode                                                    |
| S/N Ratio                     | > 52 dB (AGC off)                                                          |
| Electronic Shutter            | auto/manual: 1/50 s ~ 1/100000 s                                           |
| Wide Dynamic Range (WDR)      | yes                                                                        |
| Digital Noise Reduction (DNR) | 2D                                                                         |

### LENS

|           |                            |
|-----------|----------------------------|
| Lens Type | fixed focal, f=2.8 mm/F2.2 |
|-----------|----------------------------|

### DAY/NIGHT

|                      |                                               |
|----------------------|-----------------------------------------------|
| Mode                 | day/night switching: mechanical IR cut filter |
| Switching Mode       | auto, manual                                  |
| Visible Light Sensor | yes                                           |

### OTHER FUNCTIONS

|                  |                                              |
|------------------|----------------------------------------------|
| OSD              | languages: English, others                   |
| Image Processing | Defective Pixel Correction (DPC), sharpening |
| Remote control   | Yes (COAX protocol)                          |

### IR LED

|            |                        |
|------------|------------------------|
| LED Number | 1                      |
| Range      | 30 m                   |
| Smart IR   | yes (software support) |

### INTERFACES

|              |                       |
|--------------|-----------------------|
| Video Output | BNC, 1.0 Vp-p, 75 Ohm |
|--------------|-----------------------|

### INSTALLATION PARAMETERS

|                      |                                                                          |
|----------------------|--------------------------------------------------------------------------|
| Dimensions (mm)      | with bracket: 75 (W) x 75 (H) x 170 (L)                                  |
| Weight               | 0.37 kg                                                                  |
| Degree of Protection | IP 67 (details in the user's manual)                                     |
| Enclosure            | aluminium, white, fully cable managed wall mount bracket in-set included |
| Power Supply         | 12 VDC                                                                   |



## Bullet AHD Multistandard Camera **NHDC-2H-6101**

|                       |                                     |
|-----------------------|-------------------------------------|
| Power Consumption     | 1 W • 4 W (IR illuminator on)       |
| Operating Temperature | -30°C ~ 50°C                        |
| Humidity              | max. 90%, relative (non-condensing) |

