

8MPX panoramic IP camera with Deep Learning-based image analysis and active deterrence


NVIP-8VE-4501P/WLAD



4000

VSS
IP

KEY FEATURES

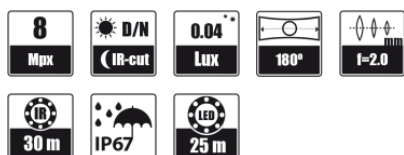

- Resolution: 8 MPX (4K Ultra HD)
- Lens: fixed focal, f=2.0 mm/F2.4
- 180° horizontal viewing angle
- D/N function - IR cut filter
- Video content analysis based on Deep Learning
- microSD card support
- WDR with double scan sensor
- two-way audio
- Min. Illumination: 0.04 lx (0 lx, IR on)
- IR LED, range up to 25 m
- white LED illuminator, range up to 15 m
- "Two way power" - when connected to a PoE switch, it allows to power the low power receiver from the camera's power socket

COMPLIANCE



DIMENSIONS

The camera is dedicated to work with NOVUS 4000 series recorders. Detailed data can be found in the compatibility table available in the **DOWNLOADABLE FILES** tab.

IMAGE

Image Sensor	8 MPX CMOS sensor 1/2.8" SONY STARVIS
Number of Effective Pixels	3840 (H) x 2160 (V)
Min. Illumination	0.04 lx/F2.4 - color mode • 0 lx (IR on) - B/W mode
Electronic Shutter	auto/manual: 1/5 s ~ 1/20000 s
Digital Slow Shutter (DSS)	up to 1/5 s
Wide Dynamic Range (WDR)	yes (double scan sensor), 120dB
Digital Noise Reduction (DNR)	3D
Highlight Compensation (HLC)	yes
Back Light Compensation (BLC)	yes
Reduction of image flicker (Antiflicker)	yes

LENS

Lens Type	fixed focal, f=2.0 mm/F2.4
-----------	----------------------------

DORI

DORI (Detection, Observation, Recognition, Identification)	for f = 2.0mm - D: 58m, O: 23m, R: 11.6m, I: 6m
--	---

DAY/NIGHT

Mode	day/night switching: mechanical IR cut filter
Switching Mode	auto, manual, time
Switching Level Adjustment	yes

NETWORK

Stream Resolution	3840 x 2160 (4K Ultra HD), 3072 x 1728, 2592 x 1520, 2592 x 1944, 2304 x 1296, 1920 x 1080 (Full HD), 1280 x 960, 1280 x 720 (HD), 640 x 480 (VGA)
Multistreaming Mode	number of streams: 3 (main stream, sub stream, third stream)
Video/Audio Compression	H.264, H.264+, H.265, H.265+/G.711
Number of Simultaneous Connections	max. 3 connections, (max. 10 streams in total)
Bandwidth	40 Mb/s in total
Network Protocols Support	HTTP, TCP/IP, IPv4/v6, HTTPS, FTP, DHCP, DNS, DDNS, NTP, RTSP, RTP, UPnP, SNMP, SMTP, P2P, HTML5, RTMP
ONVIF Protocol Support	Profile G/S/T/M

8MPX panoramic IP camera with Deep Learning-based image analysis and active deterrence NVIP-8VE-4501P/WLAD



Camera Configuration from Edge, Firefox, Chrome, Safari browser • languages: Polish, English, Russian, and others

Compatible Software NOVUS MANAGEMENT SYSTEM VSS

Mobile applications ipGO 4 (iPhone, Android)

VIDEO ANALYTICS

Functions tamper, abandoned object, object disappearance, line cross, zone entrance, zone exit, zone violation, multi loiter, pedestrian detection, cross counting, heat map, queue length detection, objects distinguishing, vehicle detection, intrusion detection

OTHER FUNCTIONS

Privacy Zones 6 video mask type: single color

Motion Detection yes

Region of interest (ROI) 8

Audio Detection decline detection, rise detection, rare sound detection

Image Processing 180° image rotation, corridor mode, vertical flip, horizontal flip

Prealarm/Postalarm up to 5 s/up to 30 s

System Reaction to Alarm Events e-mail with attachment, saving file on FTP server, saving file on SD card, push notification, active deterrent functions

Determent white LEDs, steady/flashing light, red and blue LEDs, flashing light, • audio signaling device (siren)

Restoring default settings via web browser, using reset button

IR LED

LED Number 2

Range 25 m

Smart IR yes (hardware support)

WHITE LIGHT ILLUMINATOR

LED Number 2, warm white color

Range 15 m

Smart Light yes (hardware support)

INTERFACES

Audio Input/Output built-in microphone/speaker

Network Interface 1 x Ethernet - RJ-45 interface, 10/100 Mbit/s

Memory Card Slot microSD - capacity up to 256GB

INSTALLATION PARAMETERS

Dimensions (mm) 116 (Φ) x 98 (H)

Weight 0.6 kg

Degree of Protection IP 67 (details in the user's manual)

Enclosure vandalproof, aluminium, white • enclosure type: 4VE-M

Power Supply 12 VDC, PoE (IEEE 802.3af, Class 3)

Surge protection TVS 4000 V

Power Consumption 3 W • 5 W (IR illuminator on) • 5 W (white light illuminator on) • 7 W (active deterrence functions enabled)

Operating Temperature -35°C ~ 60°C



8MPX panoramic IP camera with Deep Learning-based
image analysis and active deterrence
NVIP-8VE-4501P/WLAD

Humidity

max. 95%, relative (non-condensing)

