


8 MPX Vandal Proof IP Camera with Motor-zoom Lens

NVIP-8VE-6202M/WL-II



KEY FEATURES

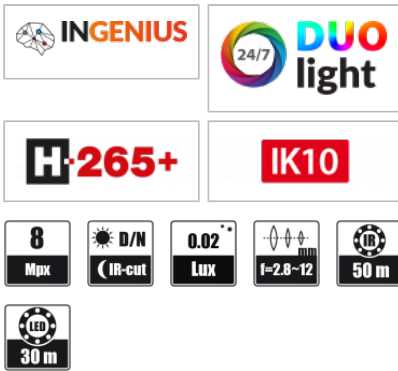

- Resolution: 8 MPX (4K Ultra HD)
- Lens: motorized, auto-iris and auto-focus function, f=2.8 ~ 12 mm/F1.6
- built-in microphone
- D/N function - IR cut filter
- Video content analysis based on Deep Learning
- microSD card support
- WDR with double scan sensor
- Min. Illumination: 0.02 lx (0 lx, IR on)
- IR LED, range up to 50 m
- white LED illuminator, range up to 30 m

COMPATIBILITY



DIMENSIONS

The camera is dedicated to work with NOVUS 6000 series recorders. Detailed data can be found in the compatibility table available in the **DOWNLOADABLE FILES** tab.

IMAGE

Image Sensor	8 MPX CMOS sensor 1/2.8" SONY
Number of Effective Pixels	3864 (H) x 2192 (V)
Min. Illumination	0.02 lx/F1.6 - color mode • 0 lx (IR on) - B/W mode
Electronic Shutter	auto/manual: 1/3 s ~ 1/100000 s
Digital Slow Shutter (DSS)	up to 1/3 s
Wide Dynamic Range (WDR)	yes (double scan sensor), 120dB
Digital Noise Reduction (DNR)	3D
Defog Function (F-DNR)	yes
Highlight Compensation (HLC)	yes
Back Light Compensation (BLC)	yes
Reduction of image flicker (Antiflicker)	yes

LENS

Lens Type	motorized, auto-iris function, f=2.8 ~ 12 mm/F1.6
Auto-focus	zoom trigger, day/night mode trigger, manual trigger

DORI

DORI (Detection, Observation, Recognition, Identification)	for f = 2.8mm - D: 88m, O: 35m, R: 17m, I: 8m • for f = 12mm - D: 277m, O: 111m, R: 55m, I: 28m
--	---

DAY/NIGHT

Switching Type	mechanical IR cut filter
Switching Mode	auto, manual, time
Switching Level Adjustment	yes
Switching Delay	2 ~ 6000 s

NETWORK

Stream Resolution	3840 x 2160 (4K Ultra HD), 3200 x 1800 (QHD+), 2688 x 1520, 2560 x 1440 (QHD), 1920 x 1080 (Full HD), 1280 x 720 (HD), 704 x 576, 640 x 480 (VGA), 640 x 360, 352 x 288 (CIF), 480 x 240
Frame Rate	20 fps for 3840 x 2160 (UHD) • 30 fps for 3072 x 2048 and lower resolutions • 30 fps for other resolutions
Multistreaming Mode	number of streams: 3
Video/Audio Compression	H.264, H.264+, H.265, H.265+/G.711
Number of Simultaneous Connections	max. 10

8 MPX Vandal Proof IP Camera with Motor-zoom Lens

NVIP-8VE-6202M/WL-II



Bandwidth	82 Mb/s in total
Network Protocols Support	HTTP, IPv4, IPv4/v6, UDP, HTTPS, FTP, DHCP, DDNS, NTP, RTSP, RTP, UPnP, SNMP, QoS, IEEE 802.1X, PPPoE, SMTP, RTCP, P2P, HTML5, RTMP
Camera Configuration	from Internet Explorer, Edge, Firefox, Chrome, Opera, Safari browser • languages: Polish, English, and others
Compatible Software	NOVUS MANAGEMENT SYSTEM VSS, NOVUS MANAGEMENT SYSTEM AC, N Control 6000
Mobile applications	N-VID6 (iPhone, Android)

VIDEO ANALYTICS

Functions	abandoned object, object disappearance, line cross, scene change, video blurred, video color cast, objects distinguishing, intrusion detection, smart motion detection with objects distinguishing
-----------	--

OTHER FUNCTIONS

Security	video encryption, configuration encryption, IEEE 802.1X support, HTTPS support, Basic authorization for HTTP/RTSP, MAC/IP address filtering, force change of default password
Privacy Zones	4 video mask type: single color
Motion Detection	yes
Region of interest (ROI)	8
Image Processing	180° image rotation, sharpening, mirror effect, corridor mode, vertical flip, horizontal flip, lens distortion correction
Prealarm/Postalarm	up to 6 s/up to 120 s
System Reaction to Alarm Events	e-mail, e-mail with attachment, saving file on FTP server, saving file on SD card
Restoring default settings	via web browser, using reset button, via NMS IPTool software

IR LED

LED Number	2
Range	50 m
Smart IR	yes (software support)

WHITE LIGHT ILLUMINATOR

LED Number	1, warm white color
Range	30 m
Smart Light	yes (software support)

INTERFACES

Audio Input/Output	1 x Jack (3.5 mm)/- • built-in microphone
Network Interface	1 x Ethernet - RJ-45 interface, 10/100 Mbit/s
Memory Card Slot	microSD - capacity up to 256GB

INSTALLATION PARAMETERS

Dimensions (mm)	112 (Φ) x 100 (H)
Weight	0.7 kg
Degree of Protection	IP 67 (details in the user's manual)
Enclosure	vandalproof IK10 impact rating aluminium, white
Power Supply	12 VDC, PoE (IEEE 802.3af, Class 3)
Surge protection	TVS 4000 V



8 MPX Vandal Proof IP Camera with Motor-zoom Lens **NVIP-8VE-6202M/WL-II**

Power Consumption	8 W • 13 W (IR illuminator on) • 10 W (white light illuminator on)
Operating Temperature	-30°C ~ 60°C
Humidity	max. 95%, relative (non-condensing)

