

## 16-channel IP Recorder NVR-6216-H1/LITE



6000 <sup>VSS</sup> **lite**

### KEY FEATURES



- 16 x video and audio channels
- Recording speed up to 480 fps at 3200 x 1800
- Supports resolution up to 3200 x 1800
- Recorded stream size: 64 Mb/s in total from all cameras
- 1 x internal place for HDD mounting
- 2 x monitor outputs (HDMI, VGA)
- Intelligent image analysis

### COMPLIANCE

ONVIF GSMA

### DIMENSIONS

The recorder is dedicated to work with NOVUS 6000 series IP cameras. Detailed data can be found in the compatibility table available in the DOWNLOADABLE FILES tab.

### VIDEO

IP Cameras	up to 16 channels at 3200 x 1800 resolution (video + audio)
Maximum Supported Camera Resolution	3200 x 1800
Compression	H.264, H.265, H.265+, H.265 Smart
Monitor Output	main (split screen, full screen, sequence): 1 x HDMI, 1 x VGA (up to 2 monitors simultaneously)
Dualstreaming Support	yes
Fisheye Support	yes, 6000 IP series cameras • using any web browser, ipGO 6, N Control 6000

### AUDIO

Audio Input/Output	- / 1 x HDMI
--------------------	--------------

### RECORDING

Stream Size	64 Mb/s in total from all cameras
Recording Mode	continuous, triggered by: manual, alarm input, motion detection, intelligent image analysis functions
Prealarm/Postalarm	up to 5 s/up to 600 s

### DISPLAY

Display Speed	480 fps (16 x 30 fps)
---------------	-----------------------

### PLAYBACK

Playback Speed	270 fps (9 x 30 fps)
Recorded Data Search	by date/time, events, image analysis events, POS, motion in a defined area, tags, license plate number

### BACKUP


Backup Methods	USB port (HDD or Flash memory), network
Backup File Format	AVI, RPAS (player included)

### STORAGE

Internal Storage	available mount: 1 x HDD 3.5" 10 TB SATA
Total Internal Capacity	10 TB

### ALARM

Camera Alarm Input/Output	supports IP camera's alarm input/output
Motion Detection	supports camera's motion detection

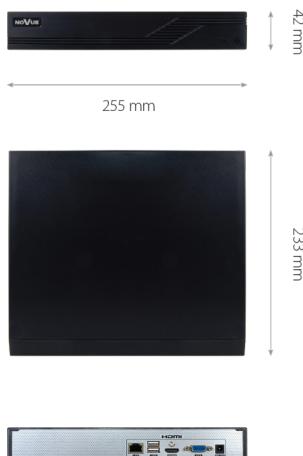

System Reaction to Alarm Events      buzzer, alarm output activation, recording activation, PTZ, e-mail with attachment, Full Screen, PUSH message, voice prompt, snapshot

**INTELLIGENT IMAGE ANALYSIS**

Supported Functions      Exception, Scene Change, Video Blurred, Video Color Cast, Tripwire, Zone entrance, Abandoned Object, Object Disappearance, Crowd detection, Face Detection, Cross Counting, Fire detection, Temperature measurement, Video metadata

**NETWORK**

Network Interface      1 x Ethernet - RJ-45 interface, 10/100 Mbit/s

Network Protocols Support      HTTP, TCP/IP, IPv4/v6, HTTPS, FTP, DHCP, DNS, DDNS, NTP, RTSP, UPnP, SNMP, IEEE 802.1X, PPPoE, SMTP, P2P, POS, HTML5

ONVIF Protocol Support      G/M/S/T profiles

PC/MAC Software      NOVUS MANAGEMENT SYSTEM VSS, NOVUS MANAGEMENT SYSTEM AC, NMS, Internet Explorer, Firefox, Chrome, Opera, N Control 6000, Edge/Safari, N Control 6000

Mobile applications      ipGO 6 (iPhone, Android)

Number of Simultaneous Connections up to 64 clients, up to 20 main streams or 64 substreams or 16 playback streams in total

Bandwidth      64 Mb/s in total to all client workstations

**PTZ**

PTZ Functions      pan/tilt/zoom, preset commands

**AUXILIARY INTERFACES**

USB Ports      2 x USB 2.0

**OPERATING SYSTEM**

Operating System      Linux

OSD      languages: Polish, English, others

Control      PC mouse (in-set included), network

System Diagnostic      automatic control of: HDDs, network, camera connection loss

Security      password protection, IP filtering, MAC filtering, ARP guard

**INSTALLATION PARAMETERS**

Dimensions (mm)      255 (W) x 42 (H) x 233 (D)

Weight      0.7 kg (without HDD)

Power Supply      12 VDC (100 ~ 240 VAC/12 VDC PSU in-set included)

Power Consumption      18 W (with 1 HDD)

Operating Temperature      -10°C ~ 50°C

*The availability of individual functions (including image analysis) depends on the model of the cameras used, as well as the software version of the recorder and cameras.*

*Presented display and playback speeds are achieved using dual-streaming. Detailed data on hard drives can be found in the compatibility table available in the DOWNLOADABLE FILES tab.*

*"INGENIUS PLUS" features support means, that "INGENIUS" is also supported*