


Hardened 8-port PoE+ Switch NVS-3308SP-EH



KEY FEATURES

- 4 x 10/100/1000Mbps High PoE
- 4 x 10/100/1000Mbps PoE+
- 1 x 10/100/1000Mb/s UPLINK, 1 x 1000Mb/s SFP UPLINK
- Operating temperature: -40°C ÷ 70°C

DIMENSIONS

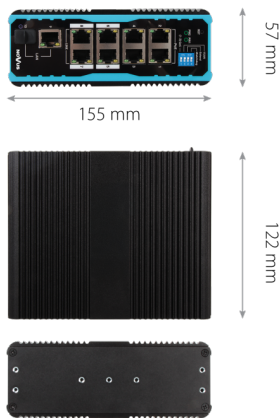

GENERAL

Device Type PoE/PoE+ network switch for harsh environments

NETWORK

Ports PoE Ports: 8 x RJ45 (10/100/1000Mbps) (4 x PoE+ 30W, 4 x High PoE 90W, total power limited by the power supply capacity) • Uplink ports: 1 x SFP 1Gbps, 1 x 10/100/1000Mbps

PoE standards IEEE802.3af, Class 3, IEEE802.3at, Class 4, IEEE802.3bt, Class 8

PoE mode Endspan (1,2+ / 3,6-)

Surge protection Maximum voltage: 6kV

Switching capacity 20 Gb/s

Supported protocols IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3ab 1000BASE-T, IEEE 802.3z 1000BASE-SX\LX

MAC address list 4K

FUNCTIONS

Additional operating modes VLAN, Extend, QoS, PoE Watchdog

INSTALLATION PARAMETERS

Case Metal, black color, enclosure with possibility to mount on DIN TH35 rail

Dimensions (mm) 57 (W) x 155 (H) x 122 (L)

Weight 0.9 kg

Input Voltage 48 VDC (power supply 100 ~ 240 VAC/48 VDC Included)

Power Consumption 144 W

PoE Budget 125 W for ports 1 to 8, up to 90 W for one port

Operating Temperature -40°C ~ 70°C