


Hardened 8-port PoE+ Switch NVS-3308SP-EH



KEY FEATURES

- 4 x 10/100/1000Mbps High PoE , 4 x 10/100/1000Mbps PoE+
- 1 x 10/100/1000Mb/s UPLINK, 1 x 1000Mb/s SFP UPLINK
- Operating temperature: -40°C ÷ 70°C

DIMENSIONS

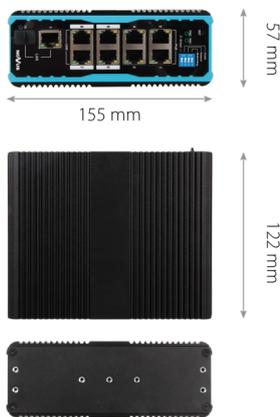

GENERAL

Device Type Hardened HighPoE / PoE+ switch

NETWORK

Ports PoE Ports: 8 x RJ45(10/100/1000Mbps) (4 x PoE+ 30W, 4 x High PoE 90W, total power limited by the power supply capacity) • Uplink ports: 1 x SFP 1Gb/s, 1 x 10/100/1000Mb/s

PoE standards IEEE802.3af, Class 3, IEEE802.3at, Class 4, IEEE802.3bt, Class 8

PoE mode Endspan (1,2+ / 3,6-)

Surge protection Maximum voltage: 6kV

Switching capacity 20 Gb/s

Supported protocols IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3ab 1000BASE-T, IEEE 802.3z 1000BASE-SX\LX

MAC address list 4K

FUNCTIONS

Additional operating modes VLAN, Extend, QoS, PoE Watchdog

INSTALLATION PARAMETERS

Case Metal, black color , enclosure with possibility to mount on DIN TH35 rail

Dimensions (mm) 57 (W) x 155 (H) x 122 (L)

Weight 0.9 kg

Input Voltage 48 VDC (power supply 100 ~ 240 VAC/48 VDC Included)

Power Consumption 144 W

PoE Budget 125 W for ports 1 to 8, up to 90 W for one port

Operating Temperature -40°C ~ 70°C