

Hardened 8-port PoE+ Switch


NVS-3308SP-EH



KEY FEATURES

- 4 x 10/100/1000Mbps High PoE
- 4 x 10/100/1000Mbps PoE+
- 1 x 10/100/1000Mb/s UPLINK, 1 x 1000Mb/s SFP UPLINK
- Operating temperature: -40°C ÷ 70°C

DIMENSIONS

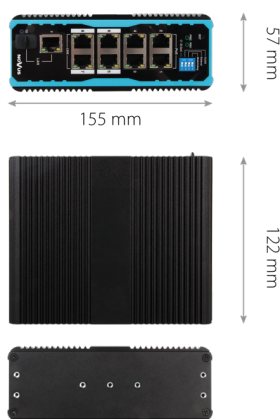

GENERAL

Device Type	PoE/PoE+ network switch for harsh environments
-------------	--

NETWORK

Ports	PoE Ports: 8 x RJ45 (10/100/1000Mbps) (4 x PoE+ 30W, 4 x High PoE 90W, total power limited by the power supply capacity) • Uplink ports: 1 x SFP 1Gbps, 1 x 10/100/1000Mbps
PoE standards	IEEE802.3af, Class 3, IEEE802.3at, Class 4, IEEE802.3bt, Class 8
PoE mode	Endspan (1,2+ / 3,6-)
Surge protection	Maximum voltage: 6kV
Switching capacity	20 Gb/s
Supported protocols	IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3ab 1000BASE-T, IEEE 802.3z 1000BASE-SX\LX
MAC address list	4K

FUNCTIONS

Additional operating modes	VLAN, Extend, QoS, PoE Watchdog
----------------------------	---------------------------------

INSTALLATION PARAMETERS

Case	Metal, black color , enclosure with possibility to mount on DIN TH35 rail
Dimensions (mm)	57 (W) x 155 (H) x 122 (L)
Weight	0.9 kg
Input Voltage	48 VDC (power supply 100 ~ 240 VAC/48 VDC Included)
Power Consumption	144 W
PoE Budget	125 W for ports 1 to 8, up to 90 W for one port
Operating Temperature	-40°C ~ 70°C