




Transmission converter **RS232/485-OPTO/A**

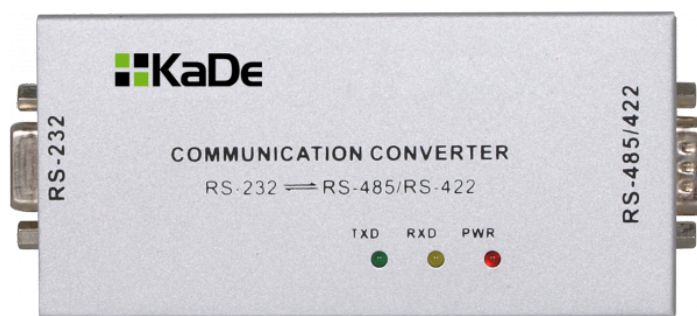

Ports type	RS-485 / RS-232
Supply power	9 - 30 V DC
Dimensions	113 x 55 x 25
Baud rate	115,2 Kbps to 300 m / 38,4 Kbps do 2400 m / 9,6 Kbps to 5000 m
Producer	KaDe
Humidity (non-condensing)	5% to 95%
Temperature load	0°C to 70°C
Current load	120 mA static, 350 mA dynamic
Mode	half-duplex, asynchronous duplex
Electric interface	1xUSB, 1x RS-232/422/485 DB9-M)
Level protection against overvoltage	to 600W