

## 8-port PoE+ Gigabit Switch NVS-G3408SP




### KEY FEATURES



### KEY FEATURES

- 8 x 10/100/1000Mbps PoE+
- 2 x 10/100/1000Mb/s UPLINK, 2 x 1000Mb/s SFP UPLINK
- Operation mode: Extend, PoE Watchdog

### DIMENSIONS

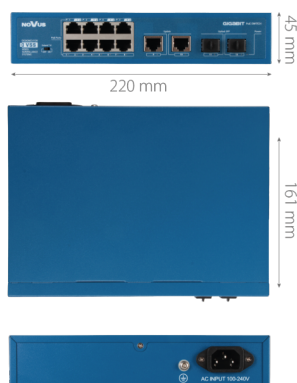

### GENERAL

Device Type PoE+ Switch

### NETWORK

|                     |                                                                                                                                                                          |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ports               | PoE+ Ports: 8 x 10/100/1000Mbps (the number of ports simultaneously operating with PoE mode is limited by PoE budget) • Uplink ports: 2 x SFP 1Gbps, 2 x 10/100/1000Mbps |
| PoE standards       | IEEE802.3af, Class 3, IEEE802.3at, Class 4                                                                                                                               |
| PoE mode            | Endspan (1,2+ / 3,6-)                                                                                                                                                    |
| Switching capacity  | 24 Gb/s                                                                                                                                                                  |
| Supported protocols | IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3ab 1000BASE-T, IEEE 802.3z 1000BASE-SX\LX, IEEE 802.3x                                                            |
| MAC address list    | 2K                                                                                                                                                                       |

### FUNCTIONS

|                            |                                                                                                                             |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| CCTV                       | Extend mode switch that increases the data and power transmission distance up to 250m (Using 10 Mb/s bandwidth) for 2 ports |
| Additional operating modes | Extend, PoE Watchdog                                                                                                        |
| Surge protection           | Port Surge: Common mode 4kV, differential mode 2kV (Class B) • Electrostatic ESDP: Air 8kV, Contact 6kV (Class C)           |

### INSTALLATION PARAMETERS

|                       |                                                                                            |
|-----------------------|--------------------------------------------------------------------------------------------|
| Case                  | Metal, blue color                                                                          |
| Dimensions (mm)       | 220 (W) x 45 (H) x 161 (L)                                                                 |
| Weight                | 1 kg                                                                                       |
| Input Voltage         | 100 ~ 240 VAC, 50/60Hz                                                                     |
| Power Consumption     | 120 W                                                                                      |
| PoE Budget            | 110 W for ports 1 to 8, no more than 60 W for the first port, 30 W for the remaining ports |
| Operating Temperature | 0°C ~ 40°C                                                                                 |