


## 8-port PoE Switch NVS-3108SP



### KEY FEATURES

- 8 x 100Mbps PoE+
- 2 x 1000Mb/s UPLINK

### DIMENSIONS

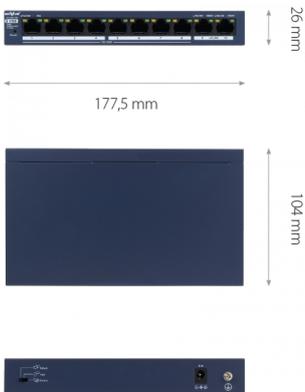

### GENERAL

Device Type PoE+ Switch

### NETWORK

Ports	PoE+ Ports: 8 x 10/100Mbps (the number of ports simultaneously operating with PoE + mode is limited by PoE budget) • UPLINK ports: 2 x 10/100/1000Mbps
PoE standards	IEEE802.3af, Class 3, IEEE802.3at, Class 4
PoE mode	Endspan (1,2+ / 3,6-), Midspan (4,5+ / 7,8-)
Switching capacity	5.6 Gb/s
Supported protocols	IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3x
MAC address list	16K

### FUNCTIONS

CCTV	Extend mode switch that increases transmission range and PoE up to 150 - 250m (Using 10 Mb/s bandwidth)
Additional operating modes	VLAN, Extend
Surge protection	yes

### INSTALLATION PARAMETERS

Case	Metal, navy blue color
Dimensions (mm)	177.5 (W) x 26 (H) x 104 (L)
Weight	600 kg
Input Voltage	51 VDC (power supply 100 ~ 240 VAC/51 VDC included)
Power Consumption	102 W
PoE Budget	99 W for ports 1 to 8, up to 30 W for one port
Operating Temperature	0°C ~ 40°C

Maximum ranges depend on cable quality, interference and camera model. The ranges were determined in laboratory conditions. For information on the exact ranges for a given camera connection and switches please contact support or perform tests in the real environment of the future operation of the devices.