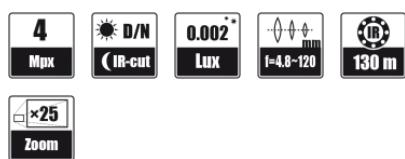


## Speed Dome IP Camera with face recognition and intelligent object tracking

**NVIP-4SD-6540/25/F-II****KEY FEATURES**

- Resolution: 4 MPX
- Lens: motorized varifocal, AI and AF function, optical zoom 25x, f=4.8 ~ 120 mm/F1.65 ~ 3.8
- D/N function - IR cut filter
- Auto Tracking
- Video content analysis based on Deep Learning
- microSD card support
- WDR with double scan sensor
- Min. Illumination from 0.002 lx (0 lx, IR on)
- IR LED, range up to 130 m (depends on current optical zoom value)

**DIMENSIONS**

The camera is dedicated to work with NOVUS 6000 series recorders. Detailed data can be found in the compatibility table available in the DOWNLOADABLE FILES tab.

**IMAGE**

Image Sensor	4 MPX CMOS sensor 1/2.5" ON Semiconductor
Number of Effective Pixels	2592 (H) x 1944 (V)
Min. Illumination	0.01 lx/F1.65 - color mode • 0.002 lx/F1.65 - B/W mode • 0 lx (IR on) - B/W mode
Electronic Shutter	auto: 1 s ~ 1/100000 s
Digital Slow Shutter (DSS)	up to 1 s
Wide Dynamic Range (WDR)	yes (double scan sensor), 120dB
Digital Noise Reduction (DNR)	2D, 3D
Defog Function (F-DNR)	yes
Highlight Compensation (HLC)	yes
Back Light Compensation (BLC)	yes
Reduction of image flicker (Antiflicker)	yes

**LENS**

Optical Zoom	25x
Lens Type	motorized, auto-iris function, f=4.8 ~ 120 mm/F1.65 ~ F3.8
Auto-focus	zoom trigger, day/night mode trigger, manual trigger

**DAY/NIGHT**


Mode	day/night switching: mechanical IR cut filter
Switching Mode	auto, manual, time
Switching Level Adjustment	yes
Switching Schedule	yes
Visible Light Sensor	yes

**NETWORK**

Stream Resolution	2560 x 1440 (QHD), 1920 x 1080 (Full HD), 2048 x 1536 (QXGA), 1280 x 960, 1280 x 720 (HD), 704 x 576, 640 x 480 (VGA), 352 x 288 (CIF)
Frame Rate	30 fps for each resolution
Multistreaming Mode	number of streams: 3
Video/Audio Compression	H.264, H.265, MJPEG/-
Number of Simultaneous Connections	max. 10
Bandwidth	50 Mb/s in total

# Speed Dome IP Camera with face recognition and intelligent object tracking

## NVIP-4SD-6540/25/F-II

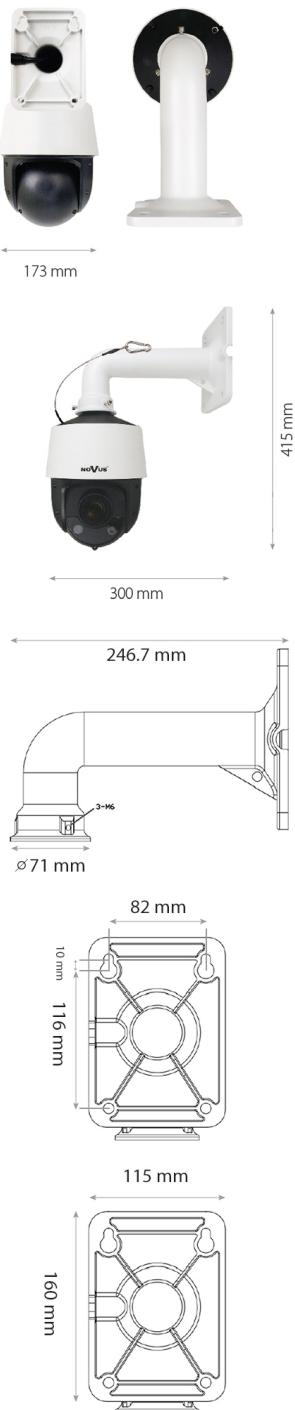

Network Protocols Support	HTTP, TCP/IP, IPv4/v6, UDP, HTTPS, FTP, DHCP, DNS, DDNS, NTP, RTSP, RTP, UPnP, SNMP, QoS, IEEE 802.1X, PPPoE, SMTP, RTCP, ICMP
ONVIF Protocol Support	Profile S
Camera Configuration	from Internet Explorer browser • languages: Polish, English, and others
Compatible Software	NOVUS MANAGEMENT SYSTEM VSS, NOVUS MANAGEMENT SYSTEM AC, N Control 6000
Mobile applications	SuperLive Plus (iPhone, Android)
<b>PTZ</b>	
Preset Commands	360 including 20 special (function) presets
Tours	8 (up to 16 presets per tour)
Patterns	4 (max. 360 commands or 180 s for each pattern)
Tilt/Pan Range	-3° ~ 90°/360° (continuous)
Pan/Tilt Speed	up to 200°/s (proportional to zoom)
Preset Speed	up to 240°/s
<b>VIDEO ANALYTICS</b>	
Functions	auto tracking linked to Video Content Analysis (VCA) functions, tamper, line cross, zone entrance, zone exit, cross counting, scene change, video blurred, video color cast, zone entrance detection and object tracking, objects distinguishing, comparing faces
<b>OTHER FUNCTIONS</b>	
Motion Detection	yes
Image Processing	180° image rotation, sharpening, mirror effect
Prealarm/Postalarm	up to 6 s/up to 120 s
System Reaction to Alarm Events	e-mail with attachment, saving file on FTP server, saving file on SD card, object tracking
Restoring default settings	via web browser, via NMS IPTool software
<b>IR LED</b>	
LED Number	6
Range	up to 130 m (depends on current optical zoom value)
Smart IR	yes (hardware support)
<b>INTERFACES</b>	
Network Interface	1 x Ethernet - RJ-45 interface, 10/100 Mbit/s
Memory Card Slot	microSD - capacity up to 256GB
<b>INSTALLATION PARAMETERS</b>	
Dimensions (mm)	173 (Φ) x 268 (H) with bracket: 173 (W) x 415 (H) x 300 (L)
Weight	2.1 kg with bracket: 2.8 kg
Degree of Protection	IP 66 (details in the user's manual)
Enclosure	aluminium, white, IK10 impact rating, In set: outdoor housing (integrated with the camera), wall mount bracket
Power Supply	12 VDC, PoE+ (IEEE 802.3at, Class 4)
Surge protection	TVS 4000 V
Power Consumption	6 W • 15.5 W (IR illuminator on) • 22 W (IR and heater on)
Operating Temperature	-30°C ~ 55°C



Speed Dome IP Camera with face recognition and intelligent  
object tracking  
**NVIP-4SD-6540/25/F-II**

Humidity	max. 90%, relative (non-condensing)
Built-in Heater/Fan	yes/yes

*The camera creates a fully functional face recognition system when used with selected NOVUS IP 6000 series recorders (models with "F" in the name).*



AAT SYSTEMY BEZPIECZEŃSTWA sp. z o.o.

[GO TO THE WEBSITE](#)