


4 MPX IP Camera with video content analysis based on Deep Learning

NVIP-4VE-6502M/F-II/7043



KEY FEATURES

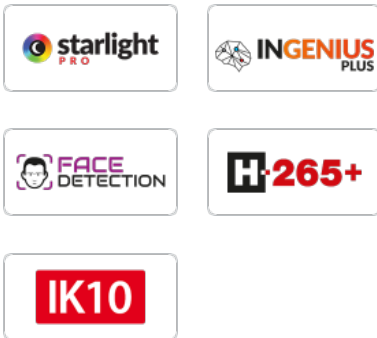

- Resolution: 4 MPX
- Lens: motorized, auto-focus function, f=2.8 ~ 12 mm/F1.3
- built-in microphone
- D/N function - IR cut filter
- Video content analysis based on Deep Learning
- microSD card support
- Min. Illumination: 0.003 lx (0 lx, IR on)
- IR LED, range up to 50 m

COMPLIANCE



DIMENSIONS

Kamera dedykowana do współpracy z rejestratorami NOVUS serii 6000. Szczegółowe dane znajdują się w tabeli kompatybilności dostępnej w zakładce **PLIKI DO POBRANIA**.

IMAGE

Image Sensor	4 MPX CMOS sensor 1/3" SmartSens
Number of Effective Pixels	2688 (H) x 1520 (V)
Min. Illumination	0.003 lx/F1.3 - color mode • 0 lx (IR on) - B/W mode
Electronic Shutter	auto: 1/2 s ~ 1/100000 s
Digital Slow Shutter (DSS)	up to 1/2 s
Wide Dynamic Range (WDR)	yes 120dB
Digital Noise Reduction (DNR)	2D, 3D
Defog Function (F-DNR)	yes
Highlight Compensation (HLC)	yes
Back Light Compensation (BLC)	yes
Reduction of image flicker (Antiflicker)	yes

LENS

Lens Type	motorized, f=2.8 ~ 12 mm/F1.3
-----------	-------------------------------

DORI

DORI (Detection, Observation, Recognition, Identification)	for f = 2.8mm - D: 58.91m, O: 23.56m, R: 11.78m, I: 5.89m • for f = 12mm - D: 205.99m, O: 82.40m, R: 41.20m, I: 20.60m
--	--

DAY/NIGHT

Mode	day/night switching: mechanical IR cut filter
Switching Mode	auto, manual, time
Switching Level Adjustment	yes
Switching Delay	2 ~ 120 s
Switching Schedule	yes
Visible Light Sensor	yes

NETWORK

Stream Resolution	2560 x 1440 (QHD), 2592 x 1520, 2304 x 1296, 1920 x 1080 (Full HD), 1280 x 720 (HD), 640 x 480 (VGA), 320 x 240 (QVGA), 480 x 240
Multistreaming Mode	number of streams: 3
Video/Audio Compression	H.264, H.264+, H.265, H.265+, MJPEG/G.711
Number of Simultaneous Connections	max. 10
Bitrate	for H.264 : 128 kbps - 8192 kbps • for H.265 : 64 kbps - 7168 kbps

4 MPX IP Camera with video content analysis based on Deep Learning NVIP-4VE-6502M/F-II/7043



Network Protocols Support	HTTP, TCP/IP, IPv4, IPv4/v6, UDP, HTTPS, FTP, DHCP, DDNS, NTP, RTSP, RTP, UPnP, SNMP, QoS, IEEE 802.1X, PPPoE, SMTP, RTCP, RTMP, SFTP, HTTP POST
Camera Configuration	from Edge, Firefox, Chrome, Opera, Safari browser • languages: Polish, English, and others
Compatible Software	NOVUS MANAGEMENT SYSTEM VSS, NOVUS MANAGEMENT SYSTEM AC, N Control 6000
Mobile applications	ipGO 6 (iPhone, Android)

VIDEO ANALYTICS

Functions	abandoned object, object disappearance, line cross, zone entrance, zone exit, zone violation, loiter, face detection, cross counting, heat map, scene change, video color cast, counting objects in the area, video metadata, illegal parking detection • ability to run multiple image analysis functions simultaneously
-----------	---

OTHER FUNCTIONS

Security	video encryption, IEEE 802.1X support, HTTPS support, Basic authorization for HTTP/RTSP, Digest authorization for HTTP/RTSP, IP and/or MAC address filtering, force change of default password
Privacy Zones	4 video mask type: single color or 4 video mask type: mosaic
Motion Detection	yes
Region of interest (ROI)	8
Audio Detection	yes
Image Processing	180° image rotation, sharpening, mirror effect, corridor mode, vertical flip, horizontal flip, lens distortion correction
Prealarm/Postalarm	up to 6 s/up to 120 s
System Reaction to Alarm Events	e-mail, e-mail with attachment, saving file on FTP server, saving file on SD card
Restoring default settings	via web browser, using reset button, via NMS IPTool software

IR LED

LED Number	3
Range	50 m
Smart IR	yes (software support)

INTERFACES

Audio Input/Output	1 x Jack (3.5 mm)/- • built-in microphone
Network Interface	1 x Ethernet - RJ-45 interface, 10/100 Mbit/s
Memory Card Slot	microSD - capacity up to 256GB

INSTALLATION PARAMETERS

Dimensions (mm)	112 (Φ) x 100 (H)
Weight	0.5 kg
Degree of Protection	IP 67 (details in the user's manual)
Enclosure	vandalproof, IK10 impact rating, aluminium, grey • enclosure type: 6VE-M
Power Supply	12 VDC, PoE (IEEE 802.3af, Class 3)
Surge protection	TVS 4000 V
Power Consumption	5 W • 9.5 W (IR illuminator on)
Operating Temperature	-30°C ~ 60°C



4 MPX IP Camera with video content analysis based on Deep Learning **NVIP-4VE-6502M/F-II/7043**

Humidity max. 95%, relative (non-condensing)

The camera creates a fully functional face recognition system when used with selected NOVUS IP 6000 series recorders (models with "F" in the name). The above specifications apply to cameras with a software version newer than or equal to 5.1.4.

