


2 MPX Bullet IP Camera NVIP-2H-6231-II/7043

6000 VSS
IP



KEY FEATURES

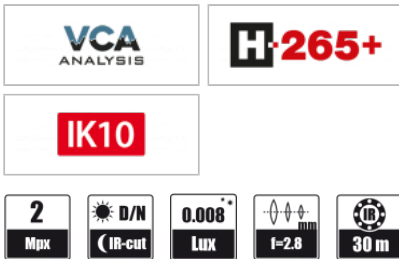

- Resolution: 2 MPX
- Lens: fixed focal, f=2.8 mm/F1.6
- D/N function - IR cut filter
- Video content analysis
- microSD card support
- Min. Illumination: 0.008 lx (0 lx, IR on)
- IR LED, range up to 30 m

COMPATIBILITY



DIMENSIONS



The camera is dedicated to work with NOVUS 6000 series recorders. Detailed data can be found in the compatibility table available in the **DOWNLOADABLE FILES** tab.

IMAGE

Image Sensor	2 MPX CMOS sensor 1/2.8" SmartSens
Number of Effective Pixels	1928 (H) x 1088 (V)
Min. Illumination	0.008 lx/F1.6 - color mode • 0 lx (IR on) - B/W mode
Electronic Shutter	auto/manual: 1/3 s ~ 1/100000 s
Wide Dynamic Range (WDR)	yes
Digital Noise Reduction (DNR)	yes
Highlight Compensation (HLC)	yes
Back Light Compensation (BLC)	yes
Reduction of image flicker (Antiflicker)	yes

LENS

Lens Type	fixed focal, f=2.8 mm/F1.6
-----------	----------------------------

DORI

DORI (Detection, Observation, Recognition, Identification)	for f = 2.8mm - D: 40.62m, O: 16.25m, R: 8.12m, I: 4.06m
--	--

DAY/NIGHT

Switching Type	mechanical IR cut filter
Switching Mode	auto, manual, time
Switching Level Adjustment	yes
Switching Delay	2 ~ 120 s
Switching Schedule	yes
Visible Light Sensor	yes

NETWORK

Stream Resolution	1920 x 1080 (Full HD), 1280 x 720 (HD), 640 x 480 (VGA), 320 x 240 (QVGA)
Frame Rate	30 fps for 1920 x 1080 (Full HD) and lower resolutions
Multistreaming Mode	number of streams: 2
Video/Audio Compression	H.264, H.264+, H.265, H.265+, MJPEG/G.711
Number of Simultaneous Connections	max. 3
Bandwidth	9 Mb/s in total

2 MPX Bullet IP Camera NVIP-2H-6231-II/7043

Network Protocols Support	HTTP, IPv4, IPv4/v6, UDP, HTTPS, FTP, DHCP, DDNS, NTP, RTSP, RTP, UPnP, SNMP, QoS, IEEE 802.1X, PPPoE, SMTP, RTCP
Camera Configuration	from Internet Explorer browser • languages: Polish, English, and others
Compatible Software	NOVUS MANAGEMENT SYSTEM VSS, NOVUS MANAGEMENT SYSTEM AC, N Control 6000
Mobile applications	SuperLive Plus (iPhone, Android)

VIDEO ANALYTICS

Functions	abandoned object, object disappearance, line cross, scene change, intrusion detection
-----------	---

OTHER FUNCTIONS

Privacy Zones	4 video mask type: single color
Motion Detection	yes
Region of interest (ROI)	8
Image Processing	sharpening, mirror effect, vertical flip, horizontal flip
Prealarm/Postalarm	up to 6 s/up to 120 s
System Reaction to Alarm Events	e-mail, e-mail with attachment, saving file on FTP server, saving file on SD card
Restoring default settings	via web browser, using reset button, via NMS IPTool software

IR LED

LED Number	1
Range	30 m
Smart IR	yes (software support)

INTERFACES

Audio Input/Output	1 x Jack (3.5 mm)/-
Network Interface	1 x Ethernet - RJ-45 interface, 10/100 Mbit/s
Memory Card Slot	microSD - capacity up to 256GB

INSTALLATION PARAMETERS

Dimensions (mm)	with bracket: 75 (W) x 75 (H) x 170 (L)
Weight	0.4 kg
Degree of Protection	IP 67 (details in the user's manual)
Enclosure	aluminium, grey, fully cable managed wall mount bracket in-set included, IK10 impact rating
Power Supply	12 VDC, PoE (IEEE 802.3af, Class 3)
Surge protection	TVS 4000 V
Power Consumption	3 W • 5.5 W (IR illuminator on)
Operating Temperature	-30°C ~ 60°C
Humidity	max. 95%, relative (non-condensing)