


## 4 MPX IP Motor-zoom Camera with video content analysis based on Deep Learning

### NVIP-4H-6522M/F-II



#### KEY FEATURES

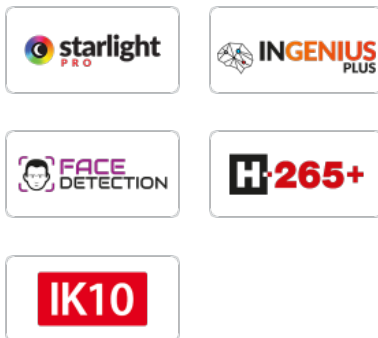

- Resolution: 4 MPX
- Lens: motorized, auto-focus function, f=2.8 ~ 12 mm/F1.3
- Human/Vehicle Object Classification
- D/N function - IR cut filter
- Video content analysis based on Deep Learning
- microSD card support
- WDR with double scan sensor
- two-way audio
- Min. Illumination: 0.003 lx (0 lx, IR on)
- IR LED, range up to 70 m

#### COMPLIANCE



#### DIMENSIONS

The camera is dedicated to work with NOVUS 6000 series recorders. Detailed data can be found in the compatibility table available in the **DOWNLOADABLE FILES** tab.

#### IMAGE

Image Sensor	4 MPX CMOS sensor 1/3" SmartSens
Number of Effective Pixels	2688 (H) x 1520 (V)
Min. Illumination	0.003 lx/F1.3 - color mode • 0 lx (IR on) - B/W mode
Electronic Shutter	auto/manual: 1/2 s ~ 1/100000 s
Digital Slow Shutter (DSS)	up to 1/2 s
Wide Dynamic Range (WDR)	yes (double scan sensor), 120dB
Digital Noise Reduction (DNR)	2D, 3D
Defog Function (F-DNR)	yes
Highlight Compensation (HLC)	yes
Back Light Compensation (BLC)	yes
Reduction of image flicker (Antiflicker)	yes

#### LENS

Lens Type	motorized, f=2.8 ~ 12 mm/F1.3
Auto-focus	zoom trigger, day/night mode trigger, manual trigger

#### DORI

DORI (Detection, Observation, Recognition, Identification)	for f = 2.8mm - D: 58.91m, O: 23.56m, R: 11.78m, I: 5.89m • for f = 12mm - D: 205.99m, O: 82.40m, R: 41.20m, I: 20.60m
--	--

#### DAY/NIGHT

Mode	day/night switching: mechanical IR cut filter
Switching Mode	auto, manual, time
Switching Level Adjustment	yes
Switching Delay	2 ~ 120 s
Switching Schedule	yes
Visible Light Sensor	yes

#### NETWORK

Stream Resolution	2560 x 1440 (QHD), 2592 x 1520, 2304 x 1296, 1920 x 1080 (Full HD), 1280 x 720 (HD), 640 x 480 (VGA), 320 x 240 (QVGA), 480 x 240
Frame Rate	30 fps for each resolution
Multistreaming Mode	number of streams: 3
Video/Audio Compression	H.264, H.264+, H.265, H.265+, MJPEG/G.711

# 4 MPX IP Motor-zoom Camera with video content analysis based on Deep Learning

## NVIP-4H-6522M/F-II



Number of Simultaneous Connections	max. 10
Bitrate	for H.264 : 128 kbps - 8192 kbps • for H.265 : 64 kbps - 7168 kbps
Network Protocols Support	HTTP, IPv4, IPv4/v6, UDP, HTTPS, FTP, DHCP, DDNS, NTP, RTSP, RTP, UPnP, SNMP, QoS, IEEE 802.1X, PPPoE, SMTP, RTCP, RTMP, SFTP, HTTP POST
Camera Configuration	from Edge, Firefox, Chrome, Opera, Safari browser • languages: Polish, English, and others
Compatible Software	NOVUS MANAGEMENT SYSTEM VSS, NOVUS MANAGEMENT SYSTEM AC, N Control 6000
Mobile applications	ipGO 6 (iPhone, Android)

### VIDEO ANALYTICS

Functions	abandoned object, object disappearance, line cross, zone entrance, zone exit, zone violation, loiter, face detection, cross counting, heat map, scene change, video blurred, video color cast, counting objects in the area, video metadata, illegal parking detection • ability to run multiple image analysis functions simultaneously
-----------	--

### OTHER FUNCTIONS

Security	video encryption, IEEE 802.1X support, HTTPS support, Basic authorization for HTTP/RTSP, Digest authorization for HTTP/RTSP, IP and/or MAC address filtering, force change of default password
Privacy Zones	4 video mask type: single color or 4 video mask type: mosaic
Motion Detection	yes
Region of interest (ROI)	8
Audio Detection	yes
Image Processing	90° image rotation, 180° image rotation, sharpening, mirror effect, corridor mode, vertical flip, horizontal flip, lens distortion correction
Prealarm/Postalarm	up to 6 s/up to 120 s
System Reaction to Alarm Events	e-mail, e-mail with attachment, saving file on FTP server, saving file on SD card, alarm output activation
Restoring default settings	via web browser, using reset button, via NMS IPTool software

### IR LED

LED Number	4
Range	70 m
Smart IR	yes (software support)

### INTERFACES

Video Output	BNC, 1.0 Vp-p, 75 Ohm
Audio Input/Output	1 x Jack (3.5 mm)/1 x Jack (3.5 mm)
Alarm Input/Output	1 (NO/NC)/1 relay type (max. 12VDC/300mA)
Network Interface	1 x Ethernet - RJ-45 interface, 10/100 Mbit/s
Memory Card Slot	microSD - capacity up to 256GB

### INSTALLATION PARAMETERS

Dimensions (mm)	with bracket: 101 (W) x 89 (H) x 280 (L)
Weight	1.1 kg
Degree of Protection	IP 67 (details in the user's manual)
Enclosure	aluminium, white, fully cable managed wall mount bracket in-set included, IK10 impact rating • enclosure type: 4H-B



## 4 MPX IP Motor-zoom Camera with video content analysis based on Deep Learning **NVIP-4H-6522M/F-II**

Power Supply	12 VDC, PoE (IEEE 802.3af, Class 3)
Surge protection	TVS 4000 V
Power Consumption	7.5 W • 11 W (IR illuminator on)
Operating Temperature	-30°C ~ 60°C
Humidity	max. 95%, relative (non-condensing)

*The camera creates a fully functional face recognition system when used with selected NOVUS IP 6000 series recorders (models with "F" in the name). The above specifications apply to cameras with a software version newer than or equal to 5.1.4.*

