


8-channel IP Recorder NVR-6408-H1/F-II

6000 VSS IP



KEY FEATURES

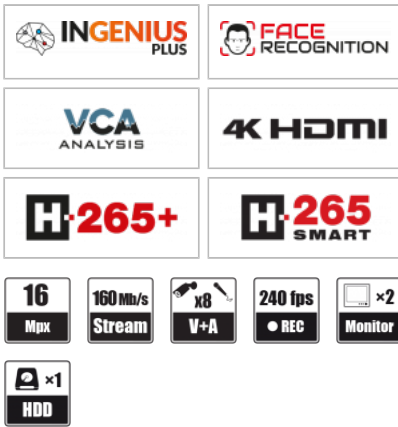


- 8 x video and audio channels
- Recording speed up to 240 fps at 5520 x 2400
- Supports resolution up to 5520 x 2400
- Recorded stream size: 160 Mb/s in total from all cameras
- 1 x internal place for HDD mounting
- 2 x monitor outputs (HDMI, VGA)
- Face recognition

COMPATIBILITY



DIMENSIONS

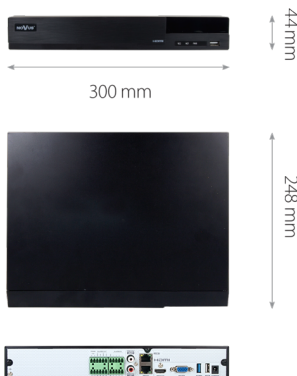

The recorder is dedicated to work with NOVUS 6000 series IP cameras. Detailed data can be found in the compatibility table available in the **DOWNLOADABLE FILES** tab.

VIDEO

| | |
|-----------------------|---|
| IP Cameras | up to 8 channels at 5520 x 2400 resolution (video + audio) |
| Compression | H.264, H.265, H.265+, H.265 Smart |
| Monitor Output | main (split screen, full screen, sequence): 1 x HDMI (4K UltraHD), 1 x VGA (up to 2 monitors simultaneously) • spot: 1 x VGA (FullHD) |
| Dualstreaming Support | yes |
| Fisheye Support | yes, 6000 IP series cameras • using NVR, any web browser, N-VID6, N Control 6000 |

AUDIO

| | |
|--------------------|--|
| Audio Input/Output | 1 x line-in (RCA) / 1 x HDMI, 1 x line-out (RCA) |
|--------------------|--|

RECORDING

| | |
|--------------------|---|
| Recording Speed | 240 fps (8 x 30 fps for 1280 x 720) |
| Stream Size | 160 Mb/s in total from all cameras |
| Recording Mode | continuous, triggered by: manual, alarm input, motion detection, face recognition, intelligent image analysis functions |
| Prealarm/Postalarm | up to 5 s/up to 600 s |

DISPLAY

| | |
|---------------|----------------------|
| Display Speed | 240 fps (8 x 30 fps) |
|---------------|----------------------|

PLAYBACK

| | |
|----------------------|---|
| Playback Speed | 240 fps (8 x 30 fps) |
| Recorded Data Search | by date/time, events, image analysis events, POS, motion in a defined area, related to face recognition, tags, license plate number |

BACKUP

| | |
|--------------------|---|
| Backup Methods | USB port (HDD or Flash memory), network |
| Backup File Format | MP4, AVI, RPAS (player included) |

STORAGE

| | |
|-------------------------|--|
| Internal Storage | available mount: 1 x HDD 3.5" 10 TB SATA |
| Total Internal Capacity | 10 TB |

ALARM

| | |
|-----------------------------|---|
| Internal Alarm Input/Output | 8/4 relay type |
| Camera Alarm Input/Output | supports IP camera's alarm input/output |

8-channel IP Recorder NVR-6408-H1/F-II

| | |
|---------------------------------|---|
| Motion Detection | supports camera's motion detection |
| System Reaction to Alarm Events | buzzer, alarm output activation, recording activation, PTZ, e-mail with attachment, Full Screen, PUSH message, voice prompt, snapshot |

INTELLIGENT IMAGE ANALYSIS

| | |
|---------------------|---|
| Supported Functions | Exception, Scene Change, Video Blurred, Video Color Cast, Tripwire, Zone entrance, Abandoned Object, Object Disappearance, Face Recognition, Perimeter Intrusion Detection by pedestrian or vehicle, Line Cross Detection by pedestrian or vehicle, Analysis of Recognized Number Plate Numbers (LPR) |
| Database Capacity | 10000 faces • 50000 license plates |
| Other parameters | face recognition for 6 NOVUS 6000 series IP cameras with 'F' in the model name or 2 ONVIF cameras |

NETWORK

| | |
|------------------------------------|--|
| Network Interface | 2 x Ethernet - RJ-45 interface, 10/100/1000 Mbit/s |
| Network Protocols Support | HTTP, TCP/IP, IPv4/v6, HTTPS, FTP, DHCP, DNS, DDNS, NTP, RTSP, UPnP, SNMP, IEEE 802.1X, PPPoE, SMTP, P2P, POS, HTML5 |
| PC/MAC Software | NOVUS MANAGEMENT SYSTEM VSS, NOVUS MANAGEMENT SYSTEM AC, NMS, Internet Explorer, Firefox, Chrome, Opera, N Control 6000, Edge/Safari, N Control 6000 |
| Mobile applications | N-VID6 (iPhone, Android) |
| Number of Simultaneous Connections | up to 64 clients, up to 12 main streams or 32 substreams or 8 playback streams in total |
| Bandwidth | 160 Mb/s in total to all client workstations |

PTZ

| | |
|---------------|--------------------------------|
| PTZ Functions | pan/tilt/zoom, preset commands |
|---------------|--------------------------------|

AUXILIARY INTERFACES

| | |
|-----------|--------------------------|
| USB Ports | 2 x USB 2.0, 1 x USB 3.0 |
|-----------|--------------------------|

OPERATING SYSTEM

| | |
|-------------------|---|
| Operating System | Linux |
| OSD | languages: Polish, English, others |
| Control | PC mouse (in-set included), network |
| System Diagnostic | automatic control of: HDDs, network, camera connection loss |
| Security | password protection, IP filtering, MAC filtering, ARP guard |

INSTALLATION PARAMETERS

| | |
|-----------------------|---|
| Dimensions (mm) | 300 (W) x 44 (H) x 248 (D) |
| Weight | 1.2 kg (without HDD) |
| Power Supply | 12 VDC (100 ~ 240 VAC/12 VDC PSU in-set included) |
| Power Consumption | 20 W (with 1 HDD) |
| Operating Temperature | -10°C ~ 50°C |

The availability of individual functions (including image analysis) depends on the model of the cameras used, as well as the software version of the recorder and cameras.

In order to create face recognition system, please deploy NOVUS 6000 series IP cameras with "F" in the model name.

Presented display and playback speeds are achieved using dual-streaming. Detailed data on hard drives can be found in the compatibility table available in the DOWNLOADABLE FILES tab.