


4 MPX Bullet IP Camera with white light and IR illuminator

NVIP-4H-6202M/WL-II

6000 VSS
IP



KEY FEATURES

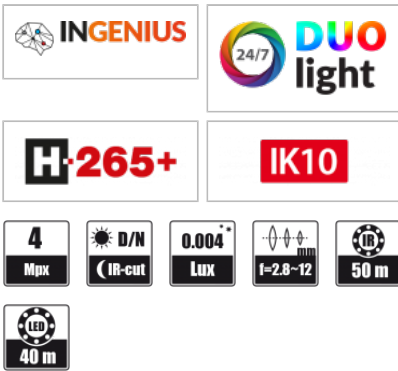

- Resolution: 4 MPX
- Lens: motorized, auto-focus function, f=2.8 ~ 12 mm/F1.4
- microSD card support
- D/N function - IR cut filter
- Video content analysis based on Deep Learning
- microSD card support
- WDR with double scan sensor
- Min. Illumination from 0.004 lx
- IR LED, range up to 50 m
- white LED illuminator, range up to 40 m

COMPATIBILITY



DIMENSIONS



Kamera dedykowana jest do współpracy z rejestratorami serii NOVUS 6000. Szczegółowe dane znajdziesz w tabeli kompatybilności dostępnej w zakładce **PLIKI DO POBRANIA**.

IMAGE

Image Sensor	4 MPX CMOS sensor 1/3" OmniVision
Number of Effective Pixels	2688 (H) x 1520 (V)
Min. Illumination	0.004 lx/F1.4 - color mode • 0 lx (IR on) - B/W mode
Electronic Shutter	auto/manual: 1/1 s ~ 1/100000 s
Digital Slow Shutter (DSS)	up to 1/1 s
Wide Dynamic Range (WDR)	yes (double scan sensor), 120dB
Digital Noise Reduction (DNR)	3D
Highlight Compensation (HLC)	yes
Back Light Compensation (BLC)	yes
Reduction of image flicker (Antiflicker)	yes

LENS

Lens Type	motorized, f=2.8 ~ 12 mm/F1.4
-----------	-------------------------------

DAY/NIGHT

Switching Type	mechanical IR cut filter
Switching Mode	auto, manual, time
Switching Level Adjustment	yes
Switching Delay	2 ~ 6000 s
Switching Schedule	yes

NETWORK

Stream Resolution	2560 x 1440 (QHD), 2304 x 1296, 1920 x 1080 (Full HD), 1280 x 720 (HD), 704 x 576, 640 x 480 (VGA), 352 x 288 (CIF), 480 x 240
Frame Rate	30 fps for each resolution
Multistreaming Mode	number of streams: 3
Video/Audio Compression	H.264, H.264+, H.265, H.265+, MJPEG/G.711
Number of Simultaneous Connections	max. 3
Bandwidth	12 Mb/s in total
Network Protocols Support	HTTP, TCP/IP, IPv4, IPv4/v6, UDP, HTTPS, FTP, DHCP, DNS, DDNS, NTP, RTSP, RTP, UPnP, SNMP, QoS, IEEE 802.1X, PPPoE, SMTP, RTCP, P2P, SSL/TLS, HTML5, RTMP
Camera Configuration	from Internet Explorer, Edge, Firefox, Chrome, Opera browser • languages: Polish, English, and others

4 MPX Bullet IP Camera with white light and IR illuminator NVIP-4H-6202M/WL-II

Compatible Software	NOVUS MANAGEMENT SYSTEM VSS, NOVUS MANAGEMENT SYSTEM AC, N Control 6000
---------------------	---

Mobile applications	N-VID6 (iPhone, Android)
---------------------	--------------------------

VIDEO ANALYTICS

Functions	abandoned object, object disappearance, line cross, scene change, video blurred, video color cast, objects distinguishing, intrusion detection, smart motion detection with objects distinguishing
-----------	--

OTHER FUNCTIONS

Privacy Zones	4 video mask type: single color
---------------	---------------------------------

Motion Detection	yes
------------------	-----

Region of interest (ROI)	8
--------------------------	---

Image Processing	90° image rotation, 180° image rotation, sharpening, mirror effect, corridor mode, vertical flip, horizontal flip
------------------	---

Prealarm/Postalarm	up to 6 s/up to 120 s
--------------------	-----------------------

System Reaction to Alarm Events	e-mail with attachment, saving file on FTP server, saving file on SD card
---------------------------------	---

Restoring default settings	via web browser, using reset button, via NMS IPTool software
----------------------------	--

IR LED

LED Number	2
------------	---

Range	50 m
-------	------

Smart IR	yes (software support)
----------	------------------------

WHITE LIGHT ILLUMINATOR

LED Number	1, warm white color
------------	---------------------

Range	40 m
-------	------

Smart Light	yes (software support)
-------------	------------------------

INTERFACES

Audio Input/Output	1 x Jack (3.5 mm)/- • built-in microphone
--------------------	---

Network Interface	1 x Ethernet - RJ-45 interface, 10/100 Mbit/s
-------------------	---

Memory Card Slot	microSD - capacity up to 256GB
------------------	--------------------------------

INSTALLATION PARAMETERS

Dimensions (mm)	with bracket: 81 (W) x 81 (H) x 220 (L)
-----------------	---

Weight	0.68 kg
--------	---------

Degree of Protection	IP 67 (details in the user's manual)
----------------------	--------------------------------------

Enclosure	aluminium, white, fully cable managed wall mount bracket in-set included, IK10 impact rating
-----------	--

Power Supply	12 VDC, PoE (IEEE 802.3af, Klasa 3)
--------------	-------------------------------------

Surge protection	TVS 4000 V
------------------	------------

Power Consumption	3.5 W • 9.5 W (IR illuminator on) • 7 W (white light illuminator on)
-------------------	--

Operating Temperature	-40°C ~ 60°C
-----------------------	--------------

Humidity	max. 95%, relative (non-condensing)
----------	-------------------------------------