

8 MPX IP camera with Deep Learning-based image analysis

NVIP-8VE-4231/WL

4000 VSS IP



KEY FEATURES



- Resolution: 8 MPX (4K Ultra HD)
- Lens: fixed focal, f=2.8 mm/F1.6
- built-in microphone
- D/N function - IR cut filter
- Video content analysis based on Deep Learning
- microSD card support
- Min. Illumination: 0.009 lx (0 lx, IR on)
- IR LED, range up to 25 m
- white LED illuminator, range up to 20 m
- "Two way power" - when connected to a PoE switch, it allows to power the low power receiver from the camera's power socket

DIMENSIONS

The camera is dedicated to work with NOVUS 4000 series recorders. Detailed data can be found in the compatibility table available in the **DOWNLOADABLE FILES** tab.

IMAGE

Image Sensor	8 MPX CMOS sensor 1/2.7" SmartSens
Number of Effective Pixels	3840 (H) x 2160 (V)
Min. Illumination	0.009 lx/F1.6 - color mode • 0 lx (IR on) - B/W mode
Electronic Shutter	auto/manual: 1/5 s ~ 1/20000 s
Digital Slow Shutter (DSS)	up to 1/5 s
Wide Dynamic Range (WDR)	yes
Digital Noise Reduction (DNR)	2D, 3D
Highlight Compensation (HLC)	yes
Back Light Compensation (BLC)	yes
Reduction of image flicker (Antiflicker)	yes

LENS

Lens Type	fixed focal, f=2.8 mm/F1.6
-----------	----------------------------

DORI

DORI (Detection, Observation, Recognition, Identification)	for f = 2.8mm - D: 74m, O: 30m, R: 15m, I: 7m
--	---


DAY/NIGHT

Mode	day/night switching: mechanical IR cut filter
Switching Mode	auto, manual, time
Switching Level Adjustment	yes
Switching Schedule	yes

NETWORK

Stream Resolution	3840 x 2160 (4K Ultra HD), 1920 x 1080 (Full HD), 1280 x 720 (HD), 640 x 480 (VGA)
Frame Rate	15 fps for each resolution
Multistreaming Mode	number of streams: 2 (main stream, sub stream)
Video/Audio Compression	H.264, H.265/G.711
Number of Simultaneous Connections	max. 4
Bitrate	for H.264 : 128 kbps - 6144 kbps • for H.265 : 128 kbps - 6144 kbps
Network Protocols Support	HTTP, TCP/IP, IPv4, HTTPS, DHCP, DNS, DDNS, NTP, RTSP, RTP, SMTP, P2P

8 MPX IP camera with Deep Learning-based image analysis NVIP-8VE-4231/WL

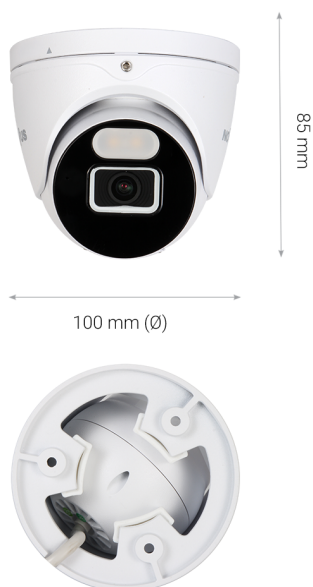

Camera Configuration	from Edge browser • languages: Polish, English, and others
Compatible Software	NOVUS MANAGEMENT SYSTEM VSS
Mobile applications	ipGO 4 (iPhone, Android)

VIDEO ANALYTICS

Functions	line cross, zone entrance, zone exit, zone violation, intrusion detection, smart motion detection with objects distinguishing
-----------	---

OTHER FUNCTIONS

Security	HTTPS support, force change of default password
Privacy Zones	4 video mask type: single color
Motion Detection	yes
Audio Detection	decline detection, rise detection
Image Processing	180° image rotation, vertical flip, horizontal flip
Prealarm/Postalarm	up to 5 s/up to 30 s
System Reaction to Alarm Events	e-mail with attachment, saving file on SD card, active deterrent functions
Deterrent	white LEDs, steady/flashing light,
Restoring default settings	via web browser, using reset button

IR LED

LED Number	1
Range	25 m
Smart IR	yes (hardware support)

WHITE LIGHT ILLUMINATOR

LED Number	2, warm white color
Range	20 m
Smart Light	yes (hardware support)

INTERFACES

Audio Input/Output	built-in microphone
Network Interface	1 x Ethernet - RJ-45 interface, 10/100 Mbit/s
Memory Card Slot	microSD - capacity up to 256GB

INSTALLATION PARAMETERS

Dimensions (mm)	100 (Ø) x 85 (H)
Weight	0.43 kg
Degree of Protection	IP 66 (details in the user's manual)
Enclosure	vandalproof, aluminium, white • enclosure type: 4VE-S
Power Supply	12 VDC, PoE (IEEE 802.3af, Class 3)
Power Consumption	2 W • 3 W (IR illuminator on) • 4 W (white light illuminator on)
Operating Temperature	-35°C ~ 60°C
Humidity	max. 90%, relative (non-condensing)



8 MPX IP camera with Deep Learning-based image analysis **NVIP-8VE-4231/WL**

AAT SYSTEMY BEZPIECZEŃSTWA sp. z o.o. hereby declares, that this NOVUS product does not contain any components or technologies manufactured by the entities mentioned in the Section 889 of the National Defense Authorization Act (NDAA) for Fiscal Year 2019. Model with modified housing. The new housing design and some technical data change for cameras with serial numbers starting from: 007914126020200001.

